

# 카트리지 타입 흡입식 휴대용 가스감지기

## GPD-100

### 제품의 특징

- ▷ 고성능 펌프 내장형으로 가스 누설을 신속하게 감지
- ▷ 카트리지 형태의 센서 적용으로 유지보수의 편의성 향상 (GTD-5000 카트리지와 동일)
- ▷ Color LCD 디스플레이 사용으로 다양한 정보 전달
- ▷ 배터리 사용 시 10시간 연속 동작 및 어댑터를 사용하여 충전 및 전원 공급 기능
- ▷ Zero Calibration 버튼 전면 배치를 통한 편리한 사용 구조
- ▷ 주요 측정 값 (Micro SD 카드) 저장 기능 (Text 파일)




CE

## General



## Dimension (Unit:mm)

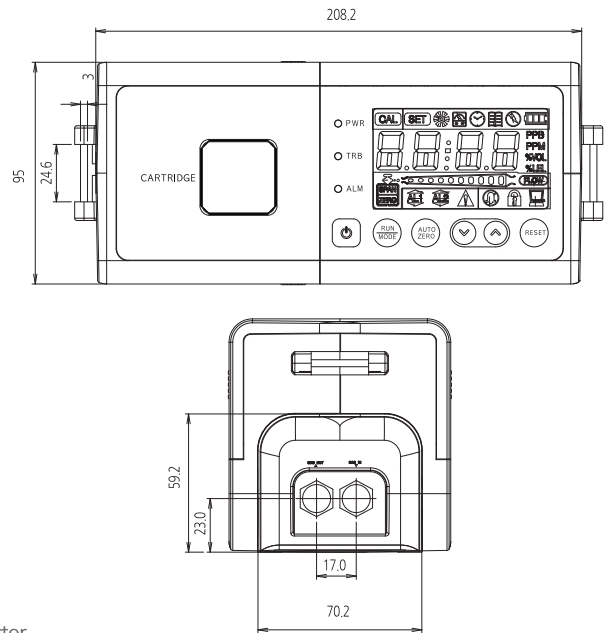

## Accessories



Sensor Cartridge



Carrying Case



Cartridge Carrying Case

## Specification

※Specifications are subject to be changed without prior notice.

AUTO SAMPLING & CARTRIDGE SENSOR TYPE PORTABLE GAS DETECTOR			
Model	GPD-100		
Measuring gas	Flammable gases	VOC gases	O <sub>2</sub> / Toxic gases(CO, Cl <sub>2</sub> , NH <sub>3</sub> & etc)
Measuring type	Auto Sampling type		
Measuring method	Catalytic cell, Hot-wire semiconductor cell Thermal conductivity cell	Photo-ionization Detector(PID)	Semiconductor cell, Electrochemical cell
Measuring range	0~100%LEL, 0~100%Vol	5ppb ~ 300ppm	Refer to Toxic Gas Measuring Range (166 page)
Response time	Flammable gases( < 15sec / 90% scale)	VOC gases(< 5sec / 90% scale)	Toxic gases( < 45sec / 90% scale)
Accuracy	±3% / Full Scale		
Parameter control	Front membrane key (power, calibration, maintenance, alarm setting, reset)		
Operation mode display	3-LED (power, 2 colored 2-stage alarm, 1-trouble)		
Measuring value display	LCD Display (4-Digit)		
Sampling method	Diaphragm Pump		
Sampling line	OD 1/4" (Standard)		
Flow rate	Normal 300~500 ml/min (0~1000 ml/min max)		
Data logging	More than 10 hours data logging function with Micro SD (T-flash) card (Option) / 2G Byte max		
Operating temperature	-20℃ to 50 ℃		
Operating humidity	5 to 99% RH (Non-condensing)		
Operating power	Battery : DC 7.4V / 4.4A Input: AC 100~230V 50 / 60Hz free volt , Output :DC12V 2.0A		
Material	Poly carbonate		
Dimensions	218 (W) × 95 (H) × 100 (D) mm		
Weight	1.2kg		
Approval	CE (EN50270:2006)		