


# 싱글채널 휴대용 가스감지기

## T40 Rattler

- ▷ Monitors CO or H2S
- ▷ Peak/hold feature
- ▷ 1개의 AA 알카라인 건전지로 1500시간 연속 측정
- ▷ 소형 사이즈와 간편한 휴대성

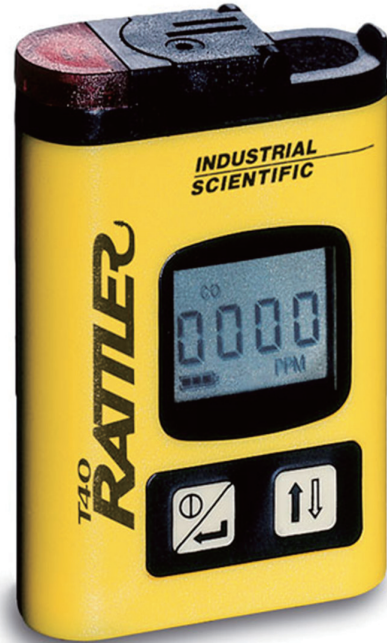

### Features and Benefits

FEATURE	BENEFIT
보증기간	24개월의 품질 보증
알람 경보	고소음지역에서 발생하는 가스알람을 사용자에게 즉시 전달
전원 공급	AA 알카라인 건전지 사용
가벼운 무게	98g (3.5온스)
교정	쉽고 간편한 교정 (Flip-cap calibration)
인증	ATEX, UL, cUL, AUS 인증
Peak/hold 특징	최고 수치가 마지막으로 설정된 이후 사용자가 최대 노출 수치 확인
휴대 방식	부착된 클립으로 안전모, 벨트, 셔츠, 바지 등에 착용 가능
간섭방지 기능	핸드폰, 라디오, 무전기 등으로부터 간섭 전파 필터링
조작미숙 방지기능	On/Off 버튼을 5초 동안 눌러야 동작
Adjustable low and high alarm setpoints	Adjustable low and high alarm setpoints
High visibility case	From a distance, the T40's color makes it easy for Safety Professionals to verify that workers are protected.
5 second delay shut-off protection	The T40 Rattler cannot be accidentally shut off since the on/off button must be depressed for five continuous seconds.

## Specification

T40 RATTLER				
Case:	High visibility, impact-resistant composite with radio frequency interference (RFI) protection.			
Dimensions:	3.375" x 2.3" x .75" (86 mm x 58 mm x 19 mm)			
Weight:	3.5 ounces (98 grams)			
Sensors:	CO, H2S - Electrochemical			
Measuring Ranges:	Gas	Symbol	Range	Increments
	Carbon Monoxide	CO	0-999 ppm	1 ppm
	Hydrogen Sulfide	H2S	0-500 ppm	1 ppm
Power Source(Run Time):	Replaceable "AA" alkaline battery (approx. 1,500 hours typical)			
Temperature Range:	-20°C to 50°C typical			
Humidity Range:	15 to 95% RH typical			
Alarms:	Adjustable low and high alarm setpoints			
Approvals:	UL and cUL - Class I, Groups A, B, C, D			
	CSA - Class I, Groups A, B, C, D			
	CENELEC (ATEX) and Australia - EEx ia IIC T4			

## Ordering Information

Part Number	Description
18105247	T40 Rattler - Hydrogen Sulfide (alarms @ 10/20 ppm)
18105254	T40 Rattler -Carbon Monoxide (alarms @ 35/70 PPM)
18105874	T40 Nylon Carrying Case



T40 Rattler



T40 Rattler