



MODEL #	55NL
<b>DISPLAY</b>	
Screen Size	55"
Max. Resolution	1920 x 1080 @60Hz
Active Display Area	1209.6mm x 680.4mm
Pixel Pitch	0.63mm x 0.63mm
Brightness	700cd/m <sup>2</sup> (Typical)
Contrast Ratio	4000:1
Aspect Ratio	16 : 9
Viewing Angle (H/V)	178°/178°
Display Color	16.7 Million
Response Time	<6.5ms
Video System	NTSC / PAL
Frequency (H)	31 ~ 80Khz
Frequency (V)	56 ~ 75Hz
<b>INTERFACE</b>	
AV(Composite) In/Out	2 / 2
S-Video In/Out	1 / 1
RGB In(15Pin D-Sub)	1
Component(Y, Pb, Pr, Sound L/R) In	1
DVI-In	1
HDMI1 / HDMI2 In	1 / 1
RS-232C In/Out	1 / 1
AV(Composite) Sound In/Out (RCA Type)	2 / 2
Audio Out/PC Audio In	1 / 1
<b>AUDIO</b>	
Built in speaker	7 W x2
<b>SPECIAL FEATURES</b>	
Multi Display Function	PIP / PBP / VOV
Filter Type	3D Comb filter / DeInterlace
Bezel Width	0.71" (18mm)
Multi-lingual Language	English, Spanish, French, German, Italian, Portuguese, Dutch
<b>DIMENSIONS</b>	
Outline Dimension (W x H x D)	48.86" x 28" x 4.06"
Net Weight	(1241mm x 711.2mm x 103mm) 99.21 lbs (45kg)
<b>MOUNT</b>	
VESA	23.62" x 7.87" x 7.87" (600mm x 200mm x 200 mm)
<b>GENERAL</b>	
Transmitter - IR Remote Control	YES
Power - Electrical Ratings - Consumption	AC100 ~ 240V(50/60Hz) 330W
Warranty - Parts/ Labor - MTBF (Approx.)	3 Year / 3 Year 50,000 Hours
Operating Temperature	32 - 104°F / 0 - 40°C
Regulations	TUV-NRTL (=UL), CB, FCC(A), CE-Emc(LVD)
Compatible Mounts - WALL - CEILING	VZ-WM60, VZ-WM70 VZ-CMK10

### 55NL ADVANTAGES:

- 55" 1080p CCTV LED Monitor
- Ultra-narrow Metal Cabinet
- Digital & Analog A/V Inputs including RS-232C
- 3D Comb-filter, De-interlace, Built-in Speakers
- 3-Year Warranty
- Image Rotation Feature Prevents "Burn-In"

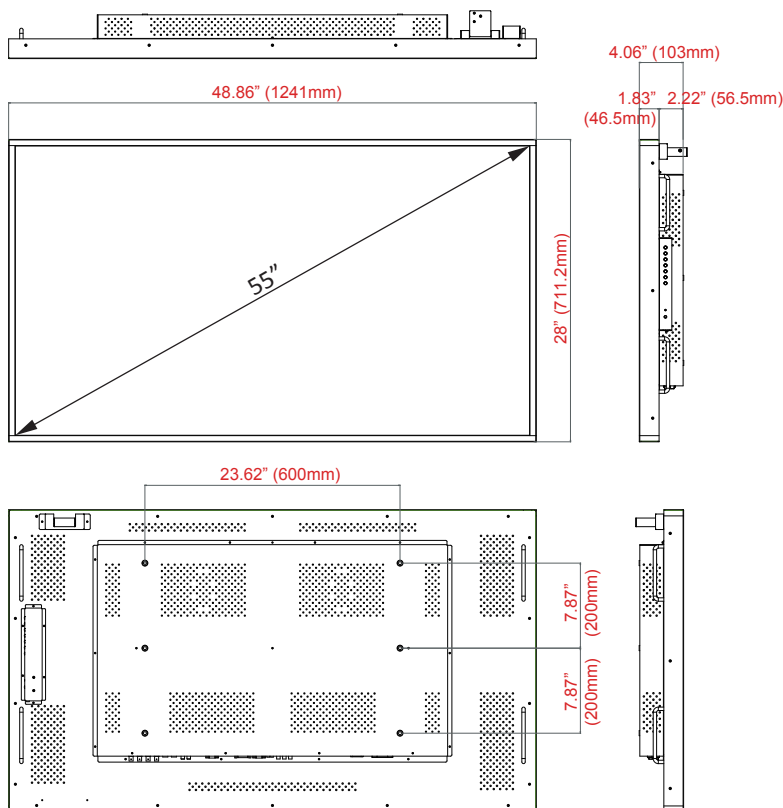

### INTERFACE



1. AC110V OUT
2. AC110V IN
3. TRIGGER IN
4. COMPONENT + AUDIO[L/R]
5. AUDIO OUT/PC AUDIO IN
6. VGA IN
7. DVI IN
8. HDMI1 IN
9. HDMI2 IN
10. RS-232C IN/OUT
11. AV(composite) SOUND L/R IN
12. S-VIDEO IN/OUT
13. AV(composite)2 IN/OUT
14. AV(composite)1 IN/OUT

### Contact Point

- <http://www.oriontechnology.co.kr>
- 1242 Apo industrial zone, In-ri, Apo-up, Gimchun-shi, Kyungbuk, Korea
- TEL: +82-54-430-8902 / FAX: +82-54-430-8904