




Engine Remote Control System & Select Unit

TCB-100 & DS-100

TCB-100 Actuator & Remote Controller

- For Single-function control by Two lever each
- Use SB-Twin & ST-Single



TCB-100

R-20

TCB-100 Specifications

| Model | | TCB-100 |
|---------------------------------|------------------|---|
| Controlling method | Clutch | 3-position control ; Ahead-Neutral-Astern |
| | Throttle | Linear control (Following-up principle) |
| Power requirement | | DC 24V (Battery) |
| Cable Actuating Force | Clutch | 25 kg Max. |
| | Throttle | 45 kg Max. |
| Cable Actuating Speed | Clutch | About 1.5 sec (Ahead-Neutral-Astern) |
| | Throttle | About 2.8 sec (Dead slow to Max, full) |
| Power Consumption | Normal | Less than 1.3A |
| | Clutch Control | Starting : Max. 8.5A at DC24V |
| | Throttle Control | Starting : Max. 8.5A at DC 24V |
| Push-Pull Cable | | S.A. C33, Ultra C8, Morse 33C |
| Applications | | Two Lever, Single Lever |
| Steering (Rudder Turning Speed) | | 90° / 6 ~ 8 sec |

Remote Controller

조이스틱 조타 + 엔진리모트용
(For Joystick Remote Steering and Engine Remote)




J-30

다이얼 조타 + 엔진리모트용
(For Dial Remote Steering and Engine Remote)




R-30


Engine Remote Control System (For SB-Twin)

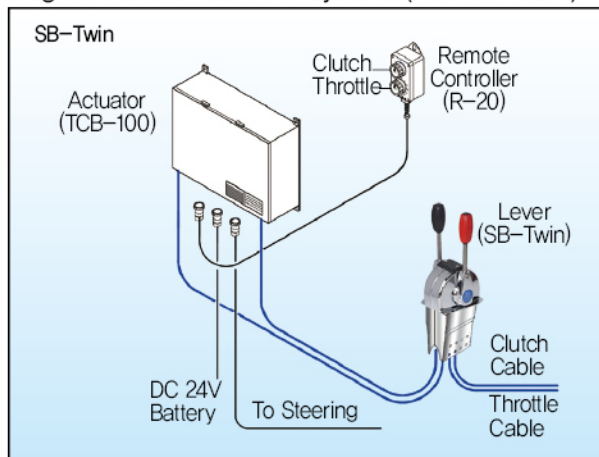

Engine Remote Control System (For ST-Single)

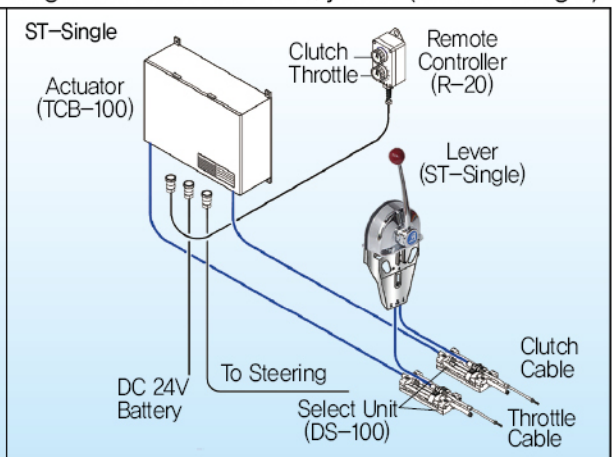

DS-100 (Application : Dual Station)

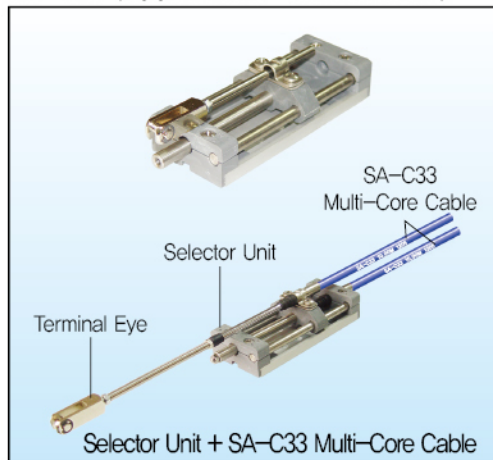

DS-100 선택장치 응용 (DS-100 Applications)

