

SAMYUNG ENC

www.samyungenc.com




SAMYUNG ENC Co., Ltd. Head Office : 1123-17, Dongsam-Dong, Youngdo-Gu, Busan, Korea, 606-083 Tel : 82-51-601-5530(Rep.) Fax : 82-51-413-4446 A/S Center : 65-20, 2-Ga Namhang-Dong, Yungdo-Gu, Busan, Korea, 606-032 Tel : 82-51-601-5570~4(Rep.) Fax : 82-51-416-5515



High resolution TFT LCD !!

Waterproof with IPX7 !!

• Fishfinder screen shot



F560

5.6["] Color Fishfinder

- 5.6" high resolution TFT LCD - Fast screen response by high performance CPU - Suitable for small fishing boat - Easy to use by icon menu - Easy to distinguish fish on bottom by digital enlargement - Reinforce fish detection by auto pulse - Detect fish by high data transmission - Easy to use by auto gain - 10-step adjustable LED backlight - Multiple languages available including

English, Chinese, Russian, Thai, Malay etc.

Easy to use by icon menu !!


View angle adjustable bracket !!


- Data field
- Prequency/Water Temperature
- 8 Depth
- Single Fish : Fish symbols with depth
- School of fish
- 6 Depth line
- Bottom : Hard bottoms such as rock and coal shown as wide bands Soft bottoms such as mud, weed and sand show as narrow bands
- **8** Range of display
- Color bar


The window scrolls from right(recent sonar record) to left(old sonar record)


Various fishfinder screen

200kHz










▲ Split bottom

▲ Split A-Scope

♦ Specifications

Display	5.6", TFT 256 color, 480 x 640 pixels
Frequency	50/200KHz
Output	600W
Depth Range	Min : 0m~3m, Max : 0m~1,500m
Color Display	16 colors
Brightness	10-step
Screen Moving Speed	super fast, fast, medium, low, stop
Alarms	too shallow, too deep, fish, temperature,
	temperature rate, low battery, dangerous AIS vessels.
Battery Voltage Display	Voltage number dispaly
AUTO GAIN adjustment	OFF/ON
A-Mode display	OFF/ON
Demo dispaly	OFF/ON
Weak Color Removal	0%~75%
Operation temp.	-15°C ~ 55°C
Supply Voltage	DC 10 ~ 34V
Consumption Power	less than 12W
Data Input/Output	NMEA0183, NMEA2000
Size	164 mm(H) x 183 mm(W) x 74 mm(D)
+ Specification is subject to change without notice	

Specification is subject to change without notice

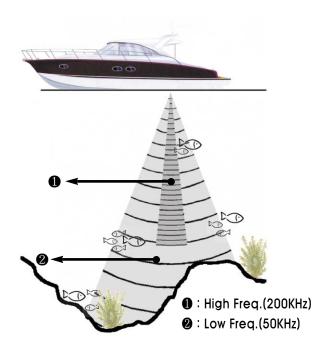

Component

- Main unit (F560)
- Transducer (B45, Water Temp, Sensor) 1EA
- 1SET Installatioin materials.

Spare parts, Manual 1LOT

♦ Dimensions

